

BESMOKEY Smoke Alarm

Photoelectric & Interconnectable



Installation Instructions and Information

This is a quick guide reference only. Please refer to instruction booklet with product for full detail of installation process. Remove from the packaging and read the installation instruction booklet before installing. Ten year warranty does not include battery. Determine the correct and most appropriate position for the BESMOKEY to be mounted based on guidelines in the instructions.


MUST BE INSTALLED BY A LICENCED ELECTRICIAN.




1. If installing in an area that is not under construction and contains excessive dust please remove the green shower cap and slide the base plate and main smoke detector model apart.



2. Open the terminal cover/and wire active/neutral into the terminals and if the smoke detector is being linked then utilize the switchwire terminal marked "S" for interconnection as per the instruction booklet. If Earth termination or looping is required a separate insulated connector such as Hyena HYICDS can be used.

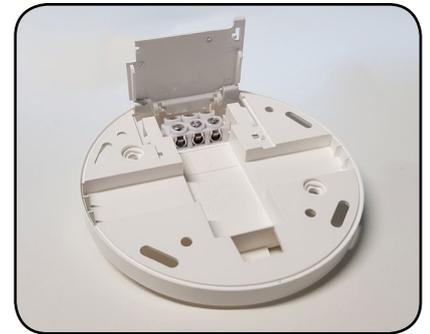

3. Once cables are terminated close the cover and mount the base plate to the ceiling using the screw and plug pack provided.

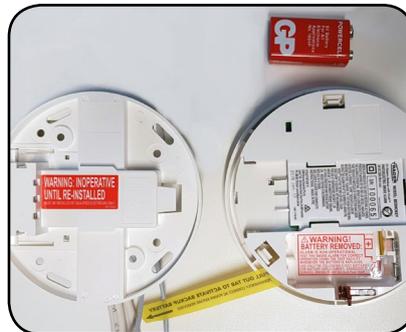

4. Once base is installed, remove the yellow tag covering the positive terminal in the battery chamber.



5. Fold in the red hinge arm and insert the battery ensuring the correct orientation.



6. Slide the smoke detector together on the base plate until fully located in place.



7. Once assembled and completely installed, turn the power on and test as per the instruction booklet.

