

SCDL

Interchangeable shells available:

SCDLSSV

(Shell - Silver)

SCDL SBK

(Shell - Black)

Cleaning Guide:

Spraying cleaning products directly on product is not recommended.

It is important to ensure that products are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic)

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Do not wash with water over 60°C.

Scorpion LED Downlight 9W

- Dimmable
- Colour Selectable
- Body colour is green
- Shell standard colour is white
- Interchangeable shells available in Silver (SCDLSSV) and Black (SCDL SBK)
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2 metres for easier installations
- Integrated driver
- Diffused lens
- *Warranty covers 5 Years Residential & 3 Years Commercial*

Product Specification

Part Code	SCDL
Colour Temp	3000K 4000K 6000K
Lumen Output	800lm
IP Rating	IP44 (from front only)
Power	9W
Beam Angle	100°
CRI	>80
Voltage Rating	240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C
Electrical Class	Class II

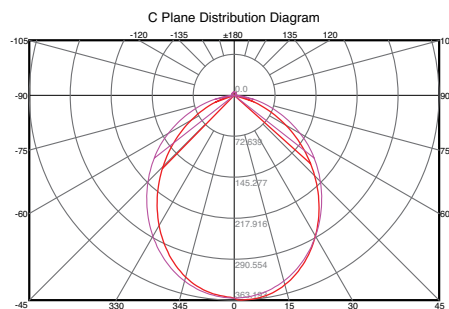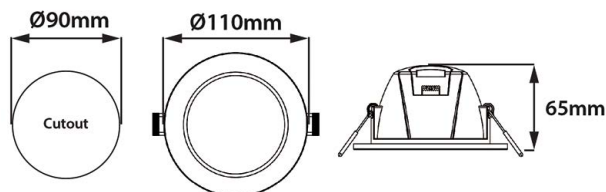

Dimming

The Scorpion Downlights have been designed for optimum performance with our Dimpala range of dimmers:

DIMR - Dimpala Universal Eclipse Dimmer // DIMPRX - Dimpala Push Rotary Dimmer No Glow // DIMPR - Dimpala Push Rotary Dimmer

Please refer to our Website or Catalogue for further detail and accessories

Note: In some regions a slight flicker may occur when the luminaire is dimmed. This could be due to power line signals sent by electricity supply utilities. This effect is not a malfunction of the luminaire or dimmer but could be a result of local power supply changes. If this occurs at any stage adjusting the dimmer back to maximum output should minimise the effect.

Certification Number:

GMA-503176

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
November 2018



SCDLWW (Warm White)

Interchangeable shells available:

SCDLSSV
(Shell - Silver)
SCDLSBK
(Shell - Black)

Cleaning Guide:

Spraying cleaning products directly on product is not recommended.

It is important to ensure that products are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic)

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Do not wash with water over 60°C.

Scorpion LED Downlight - SCDLWW

- Dimmable
- Warm White
- Body colour is white
- Shell standard colour is white
- Interchangeable shells available in Silver (SCDLSSV) and Black (SCDLSBK)
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2 metres for easier installations
- Integrated driver
- Diffused lens
- Warranty covers 5 Years Residential & 3 Years Commercial

Product Specification

Part Code	SCDLWW
Colour Temp	3000K
Lumen Output	700lm
IP Rating	IP44 (from front only)
Power	9W
Beam Angle	100°
CRI	>80
Voltage Rating	240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C
Electrical Class	Class II

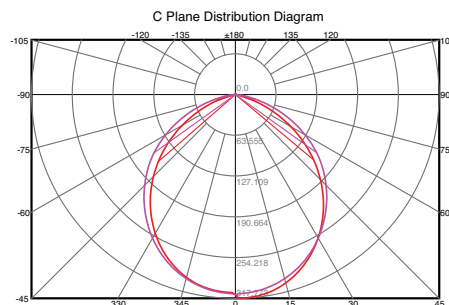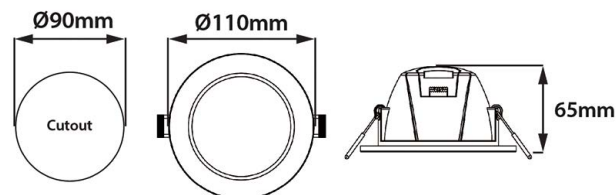

Dimming

The Scorpion Downlights have been designed for optimum performance with our Dimpala range of dimmers:

DIMR - Dimpala Universal Eclipse Dimmer // DIMPRX - Dimpala Push Rotary Dimmer No Glow // DIMPR - Dimpala Push Rotary Dimmer
Please refer to our Website or Catalogue for further detail and accessories

Note: In some regions a slight flicker may occur when the luminaire is dimmed. This could be due to power line signals sent by electricity supply utilities. This effect is not a malfunction of the luminaire or dimmer but could be a result of local power supply changes. If this occurs at any stage adjusting the dimmer back to maximum output should minimise the effect.

Certification Number:

GMA-503176

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au

www.gsm.com.au



Data Specification Sheet
November 2018



SCDLCW (Cool White)

Interchangeable shells available:

SCDLSSV
(Shell - Silver)
SCDLSBK
(Shell - Black)

Cleaning Guide:

Spraying cleaning products directly on product is not recommended.

It is important to ensure that products are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic)

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Do not wash with water over 60°C.

Scorpion LED Downlight - SCDLCW

- Dimmable
- Cool white
- Body colour is white
- Shell standard colour is white
- Interchangeable shells available in Silver (SCDLSSV) and Black (SCDLSBK)
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2 metres for easier installations
- Integrated driver
- Diffused lens
- Warranty covers 5 Years Residential & 3 Years Commercial

Product Specification

Part Code	SCDLCW
Colour Temp	4000K
Lumen Output	750lm
IP Rating	IP44 (from front only)
Power	9W
Beam Angle	100°
CRI	>80
Voltage Rating	240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C
Electrical Class	Class II

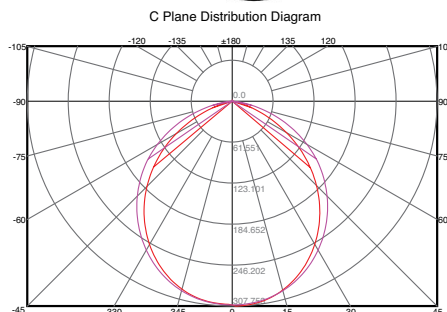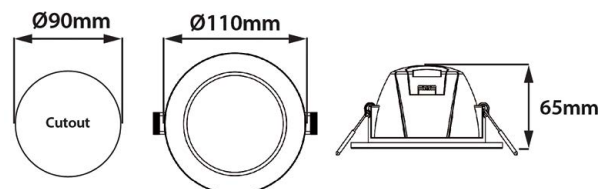

Dimming

The Scorpion Downlights have been designed for optimum performance with our Dimpala range of dimmers: DIMR - Dimpala Universal Eclipse Dimmer // DIMPRX - Dimpala Push Rotary Dimmer No Glow // DIMPR - Dimpala Push Rotary Dimmer Please refer to our Website or Catalogue for further detail and accessories

Note: In some regions a slight flicker may occur when the luminaire is dimmed. This could be due to power line signals sent by electricity supply utilities. This effect is not a malfunction of the luminaire or dimmer but could be a result of local power supply changes. If this occurs at any stage adjusting the dimmer back to maximum output should minimise the effect.

Certification Number:
GMA-503176

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
November 2018

