



SCDL2

SCDLS

SCDLLG

SCORPION™

Downlights




SCDL2

LED Downlight 8W TriTemp WW CW DL 90mm
750LM Dimmable Perfect for Trader Dimmers

- Dimmable
- Colour Selectable - CCT 3 (see chart)
- Body colour is green
- Shell standard colour is white
- Interchangeable shells available in Silver and Black (SCDL2SSV, SCDL2SBK)
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2m for easier installations
- Integrated driver
- Diffused lens

Product Specification

Part Code	SCDL2
Colour Temp	3000K 4000K 5700K
Lumen Output	750lm
IP Rating	IP44 (from front only) IP20 (from rear)
Power	8W
Beam Angle	110°
CRI	>80
Voltage Rating	220-240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C (IC-4@ ta 25°C)
Electrical Class	Class II

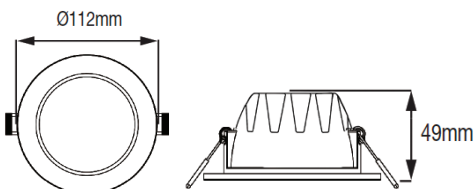


SCDLS

LED Downlight Slim Profile 8W Separate Driver
TriTemp WW CW DL 90mm 750lm-670lm
Dimmable Perfect for Trader Dimmers

- Dimmable
- Colour Selectable - CCT 3 (see chart)
- Body colour is white
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2m for easier installations
- Diffused lens
- Separate driver

Product Specification

Part Code	SCDLS
Colour Temp	3000K 4000K 5700K
Lumen Output	750lm
IP Rating	IP44 (from front only) IP20 (from rear)
Power	8W
Beam Angle	110°
CRI	>80
Voltage Rating	220V-240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C (IC-4@ ta 25°C)
Electrical Class	Class II

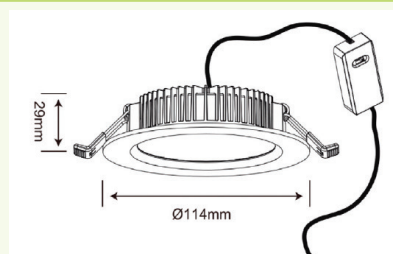

SCDLLG

LED Downlight Low Glare 8W 4-Temp 3K 4K 5K
5.7K 90mm 750LM-670LM Dimmable
Perfect for Trader Dimmers

- Dimmable
- Colour Selectable (4 CCT colours)
- Body colour is white
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2m for easier installations
- Integrated driver

Product Specification

Part Code	SCDLLG
Colour Temp	3000K 4000K 5000K 5700K
Lumen Output	750lm
IP Rating	IP44 (from front only) IP20 (from rear)
Power	8W
Beam Angle	60°
CRI	>80
Voltage Rating	220V-240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C (IC-4@ ta 25°C)
Electrical Class	Class II

