BESMOKEY10V2

See current catalogue for further detail

Photoelectric Smoke Alarm Wireless Ready - Mains Powered



- Photoelectric Sensing Technology.
- Activfire® Listed.
- Complies with AS3786:2023.
- Main power source 220-240 V AC 50 Hz.
- Secondary power source DC 3V battery 10 Year Lithium.
- Interconnection Max. 20 alarms (wired 150m maximum).
- Wireless upgradeable by clipping in BESMOKEY10WM and linking with other alarms that also contain the module.
- 4 hard wired terminals that accommodate 2 x 2.5mm^2 (A, E-Loop, N , I-connect) for hard wired applications.
- Surface Mount Base Plate with Large Cable Terminals.
- Suitable for Ceiling or Wall Mounting.
- Alarm volume ≥ 85dB(A) @ 3m complying with ISO8201 alarm pattern.
- Operating Temperature 0 °C to 40 °C.
- Maximum humidity for installation: ≥95% Relative Humidity (non-condensing).
- Red LED Alarm Status Indication.
- Green LED AC Mains Power Indication.
- Separate test and Hush Buttons to assist with wireless linking.
- Insect Screen protects Sensing Chamber.
- Sleek Styling.
- Early warning.
- Reduce Nuisance alarms.
- Dual-Spectrum Technology.
- 5.9x Greater Dust Tolerance*
- 5.6x Greater Insect Resistance*
- 4.4x Greater Vapour Resistance*
- 3.9x Greater Construction-Dust Resistance*
- The BESMOKEY10V2 with BESMOKEY10WMV2 can also pair to BESMOKEY10BWV2.
- 10 Year warranty.

*Compared with BESMOKEY10 1st Generation Sensor Technology

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Catalogue Number	Description
BESMOKEY10V2	Smoke Alarm Wireless Interconnect Photoelectric Surface Mount 220 240V ac 3V DC Lithium 10 Year Battery White

Certification Number:


GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au

BESMOKEY10V2

See current catalogue for further detail


Photoelectric Smoke Alarm Wireless Ready

Making BESMOKEY10V2 Wireless:

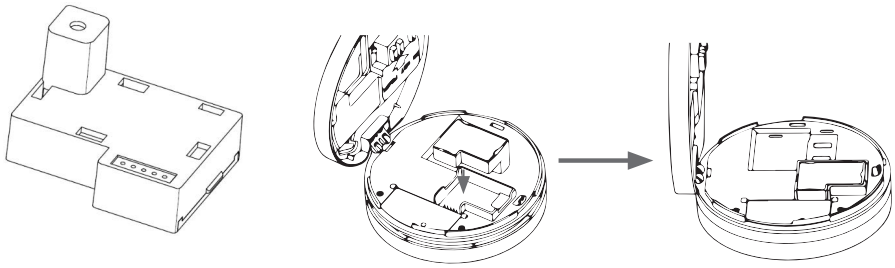

To make wireless, before removing battery tag add BEMOKEY10MWV2, then connect battery and power. Follow instruction to pair the wireless alarms in the network.

Example of a network using BESMOKEY10V2 combined with hard wired and interconnected (using cable) with a single "master" alarm with the BESMOKEY10MWV2 module fitted communicating with others in the system that are operating from the 10 Year Lithium battery.

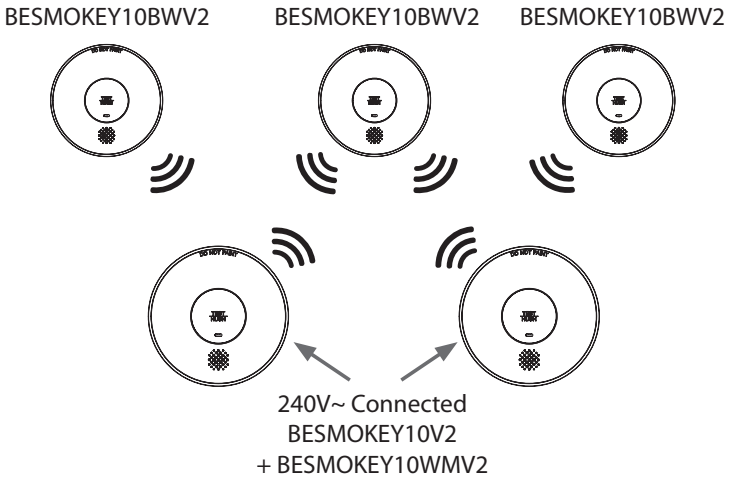

BESMOKEYREMV2 can be installed on wireless network for convenient control.

BESMOKEY10 Smoke Alarms come with a 10 Year Warranty from date of purchase. BESMOKEY10 Accessories are warranted for 7 Years from date of purchase. Proof of Purchase is required for Warranty Claims

– please see www.gsme.com.au for details regarding warranty claims.

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Catalogue Number	Description
BESMOKEY10V2	Smoke Alarm Wireless Interconnect Photoelectric Surface Mount 220 240V ac 3V DC Lithium 10 Year Battery White

Certification Number:

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au