


BUEXSO310
BUEXSO315
BUEXSO320F
BUEXSO320
BUEXSO332
BUEXSO410
BUEXSO420
BUEXSO432
BUEXSO440
BUEXSO450
BUEXSO510
BUEXSO520
BUEXSO532
BUEXSO540
BUEXSO550

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2



IP66 Extension Sockets

- Small Single Phase 10A to 20A (250V~).
- Size 1 Single & Three Phase 10A to 20A (250V~ to 500V~).
- Size 2 Single & Three Phase 32A to 50A (250V~ to 500V~).
- 3 Flat Pin, 3 Round Pin, 4 Round Pin, 5 Round Pin.
- 10A, 15A, 20A, 32A, 40A & 50A current ratings.
- Straight body format providing a more traditional design.
- Ribbed Lock ring on Small Single Phase versions for gripping with gloved hands.
- Rear cord entry and cable gland ensuring IP66 rating.
- Internal cable clamp to support electrical connections.
- Size 1 Single and Three Phase suits Smaller to Medium single or three phase loads.
- Size 2 Single and Three Phase suits Medium to Large single or three phase loads.
- Size 1 and Size 2 products have hinged Spring Loaded cover flaps for added safety and to keep dust & water out.
- Small Extension Sockets 10A and 20A accept cables from $\varnothing$ 6-12mm
- Size 1 Extension Sockets 10A and 20A accept cables from $\varnothing$ 12-16mm
- Size 2 Extension Sockets 32A, 40A and 50A accept cables from $\varnothing$ 11-16mm



Pin & Volt	*Cat No. Extension Sockets	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Terminal Size	Maximum Conductor Size (mm ²)	Minimum Cable Diameter (mm ²)	Maximum Cable Diameter (mm ²)	Gland Nut Thread (mm)	Matching Plug Straight / Angled	Matching Appliance Inlet
3 Pin 250V~	BUEXSO310	10	3 Flat	A	2.4 x 4.5	6	6	12	M20 x 1.5	BUP310	BUAI310
	BUEXSO315	15	3 Flat	B	2.4 x 4.5	6	6	12	M20 x 1.5	BUP315	BUAI315
	BUEXSO320F	20	3 Flat	E	2.4 x 4.5	6	6	12	M20 x 1.5	BUP320F	
	BUEXSO320	20	3 Round	G	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP320/ BUPA320	BUAI320
	BUEXSO332	32	3 Round	H	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP332/ BUPA332	BUAI332
4 Pin 500V~	BUEXSO410	10	4 Round	I	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP410/ BUPA410	BUAI410
	BUEXSO420	20	4 Round	J	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP420/ BUPA420	BUAI420
	BUEXSO432	32	4 Round	K	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP432/ BUPA432	BUAI432
	BUEXSO440	40	4 Round	L	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP440/ BUPA440	BUAI440
	BUEXSO450	50	4 Round	M	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP450/ BUPA450	BUAI450
5 Pin 500V~	BUEXSO510	10	5 Round	N	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP510/ BUPA510	BUAI510
	BUEXSO520	20	5 Round	O	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP520/ BUPA520	BUAI520
	BUEXSO532	32	5 Round	P	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP532/ BUPA532	BUAI532
	BUEXSO540	40	5 Round	Q	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP540/ BUPA540	BUAI540
	BUEXSO550	50	5 Round	R	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP550/ BUPA550	BUAI550

All products accept Plug (BUP/BUPA), locking rings which prevents accidental removal and assists with maintaining the highest IP Rating and a spring loaded flap that seals out dust and moisture when not in use. Compatible with common pendant outlet kits.

Certification Number:

BUESXO320, BUESXO332, BUESXO410, BUESXO420, BUESXO432, BUESXO440 BUESXO450, BUESXO510, BUESXO520, BUESXO532, BUESXO540 BUESXO550: GMA-527928
 BUEXSO310, BUEXSO315, BUEXSO320F: GMA-527862-EA


GSM Electrical (Australia) Pty Ltd

5-9 Rundle Street, Kent Town SA 5067
 P: 1300 301 838 | E: service@gsmc.com.au
 www.gsmc.com.au



BUEXSO310
BUEXSO315
BUEXSO320F
BUEXSO320
BUEXSO332
BUEXSO410
BUEXSO420
BUEXSO432
BUEXSO440
BUEXSO450
BUEXSO510
BUEXSO520
BUEXSO532
BUEXSO540
BUEXSO550

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


PAGE 2 of 2





IP66 Extension Sockets

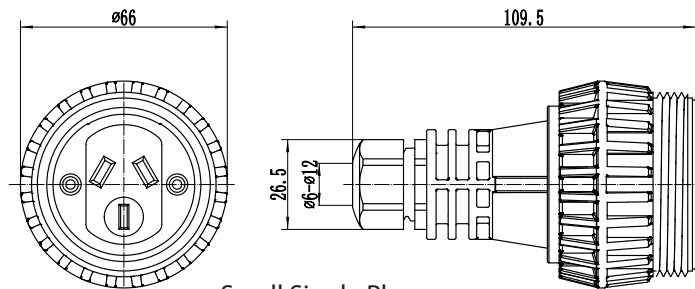

Small Single Phase

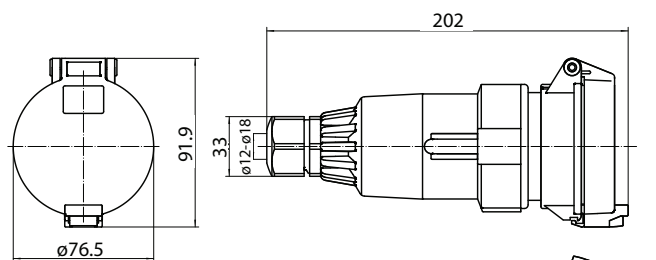

Size 1 Single & Three Phase

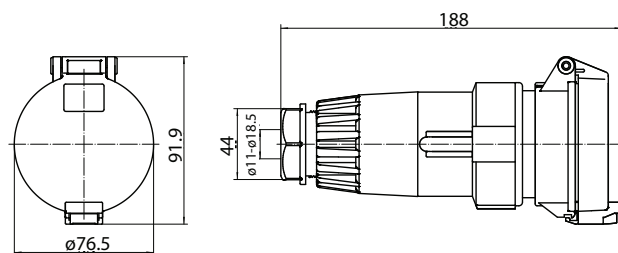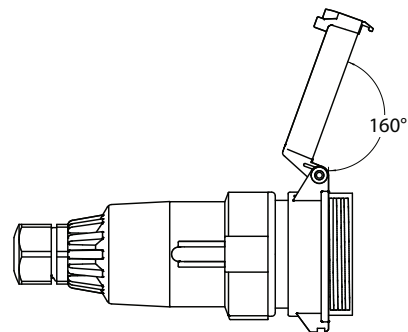

Size 2 Single & Three Phase

