


BUC310
BUC310L
BUC315
BUC320F
BUC320
BUC332
BUC410
BUC420
BUC432
BUC440
BUC450
BUC510
BUC520
BUC532
BUC540
BUC550

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2



IP66 Combination Switched Sockets

Buffalo offers an extensive range of IP66 rated Combination Switched Sockets that are available in three-pin 10A to 32A, four-pin 10A to 50A and five-pin 10A to 50A designs.

Phase links are factory fitted between switches and sockets.

Small Single phase Flat pin - 10A to 20A
 Size 1 Single & Three Phase - 10A- 20A
 Size 2 Single & Three Phase - 32A - 50A

Heavy Duty terminals are standard on all products with Double Pole switching option as standard on 3 pin products.

The combination switch handle has two padlocking facilities (Oval Shape 11 x 9mm) so equipment can be safely isolated.

Switch is provided with LED fitment option (not supplied).

Combination sockets feature a clear dustproof & hoseproof flap allowing simple viewing of sockets. The flap is also provided with a reliable spring-tensioned latch to keep dust & liquids out.

Part bag contains twin screwed connector.



Pin & Volt	Cat No.	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Enclosure	AC21 Rating (A)	AC23A Rating (A)	M Rating	Minimum Conductor Size (mm²)	Maximum Conductor Size (mm²)	Dimensions H* x W x D (mm)	Matching Plug Straight	Matching Plug Angled
3 Pin 250V~	BUC310	10	3 Flat	A	BUBB2GS	10	10	200	1.5	6	198x101x84	BUP310	-
	BUC310L	10	2 Flat 1 Round	C	BUBB2GS	10	10	200	1.5	6	198x101x84	BUP310L	-
	BUC315	15	3 Flat	B	BUBB2GS	15	15	200	1.5	6	198x101x84	BUP315	-
	BUC320F	20	3 Flat	E	BUBB2GS	20	20	200	2.5	16	198x101x84	BUP320F	-
	BUC320	20	3 Round	G	BUBB2G	20	20	200	2.5	16	198x101x108	BUP320	BUPA320
	BUC332	32	3 Round	H	BUBB2G	32	32	200	6	16	198x101x108	BUP332	BUPA332
4 Pin 500V~	BUC410	10	4 Round	I	BUBB2G	10	10	200	6	16	198x101x108	BUP410	BUPA410
	BUC420	20	4 Round	J	BUBB2G	20	20	200	6	16	198x101x108	BUP420	BUPA420
	BUC432	32	4 Round	K	BUBB2G	32	32	200	6	16	198x101x108	BUP432	BUPA432
	BUC440	40	4 Round	L	BUBB2G	40	40	200	6	16	198x101x108	BUP440	BUPA440
	BUC450	50	4 Round	M	BUBB2G	50	50	200	6	16	198x101x108	BUP450	BUPA450
5 Pin 500V~	BUC510	10	5 Round	N	BUBB2G	10	10	200	2.5	6	198x101x108	BUP510	BUPA510
	BUC520	20	5 Round	O	BUBB2G	20	20	200	2.5	6	198x101x108	BUP520	BUPA520
	BUC532	32	5 Round	P	BUBB2G	32	32	200	6	16	198x101x108	BUP532	BUPA532
	BUC540	40	5 Round	Q	BUBB2G	40	40	200	6	16	198x101x108	BUP540	BUPA540
	BUC550	50	5 Round	R	BUBB2G	50	50	200	6	16	198x101x108	BUP550	BUPA550

When ordering LESS ENCLOSURE add "LE" at end of catalogue number, ie "BUC310LE"

Certification Number:

BUC410, BUC420, BUC432, BUC440, BUC450, BUC510, BUC520,
 BUC532, BUC540, BUC550 : AZ69025570
 BUC310, BUC315, BUC320F: GMA-513502-EA
 BUC320, BUC332: AZ69025651


GSM Electrical (Australia) Pty Ltd

5-9 Rundle Street, Kent Town SA 5067
 P: 1300 301 838 | E: service@gsm.com.au
 www.gsm.com.au



BUC310
BUC310L
BUC315
BUC320F
BUC320
BUC332
BUC410
BUC420
BUC432
BUC440
BUC450
BUC510
BUC520
BUC532
BUC540
BUC550

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


PAGE 2 of 2




May 2026

IP66 Combination Switched Sockets

Flat Pin Models

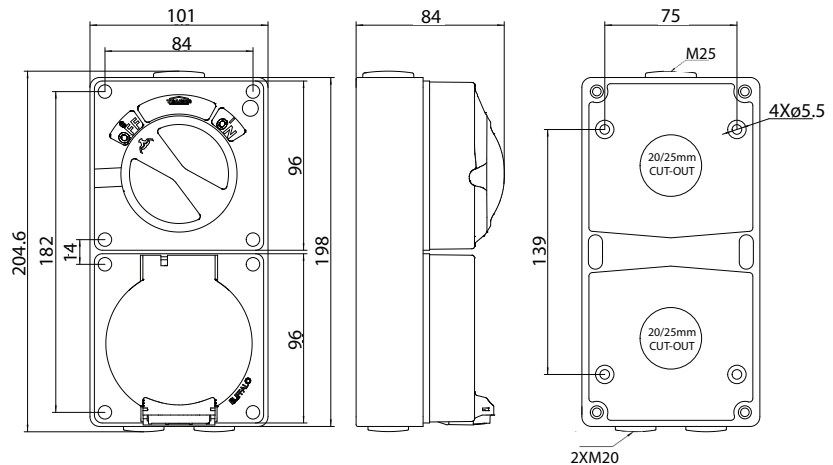

Round Pin Models

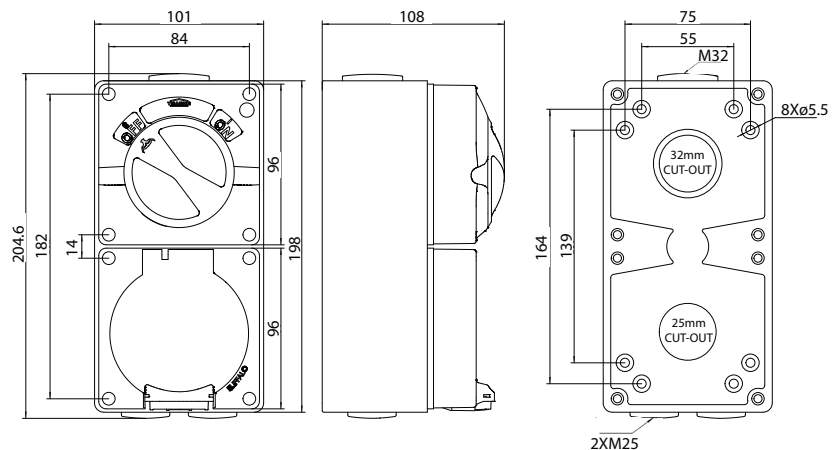

Small Single Phase
Flat pin
10A to 20A



Size 1
Single/Three Phase
10A - 20A



Size 2
Single/Three Phase
32A - 50A