MEPBMWV2

See current catalogue for further detail

BUTTON CAPS:
MEBUMW
MEBUMBK
MEBUC
MEBUCBK
MEBUCSV
MEBUCMW
MEBUCMBK



CAN BE USED IN CONJUNCTION WITH:
MEPBE Electronic Switch



DIMPBD Digital Switched Dimmer





Amber & Blue LED

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Push Button Switching & Dimming

MEPBMWV2 Push Button, Multi-Way Remote Dimming and On/Off Switching

The MEPBMWV2 Remote Button enables Multi-Way dimming and ON/OFF switching with the **DIMPBDV2** Digital Dimmer. It can also be used in conjunction with MEPBEV2 switch for Multi-Way ON/OFF control switching only.
The inbuilt LED indicator can be configured two ways by connecting Neutral to the MEPBMWV2:

1. With a Neutral connected to terminal N-1 indicator light will be Amber.
2. With a Neutral connected to terminal N-2 indicator light will be Blue.

The MEPBMWV2 will operate without neutral connected but the LED indicator will not function.

If a Neutral is connected the LED indicator will not turn off.

The MEPBMWV2 will operate without neutral connected but the LED indicator will not function. Multiple MEPBMWV2 push button mechanisms can be connected in parallel to a single DIMPBDV2 dimmer or a MEPBEV2 electronic switch, provided the total length of the remote connection does not exceed 50 metres. It operates as a 'slave' button and provides full functionality to the master module that it is connected to.

LOAD COMPATIBILITY

- For use with MEPBEV2 or DIMPBDV2 mechs only (NOT FOR STANDALONE MAINS SWITCHING).

FEATURES

- Enables Multi-Way dimming and ON/OFF switching for DIMPBDV2 Digital Dimmers.
- Enables Multi-Way ON/OFF switching for MEPBEV2 Electronic Switches.
- Neutral not required for button only operation (no illumination).
- Optional LED Indicator operation requires Neutral.
- Supplied with MEBU Gloss White & Gloss Black buttons, suits Puma, Cougar & Flat Cat gloss finishes.

OPERATING CONDITIONS

- Operating Voltage: 230 - 240Va.c. 50Hz.
- Power Rating: Based upon connected Dimmer or Electronic Switch.
- Connection Type: Terminal Block.
- Operating Temperature: 0 to +50 °C.
- Compliance Standard: AS/NZS 60669.2.1, CISPR15.


Note: Operation at temperature, voltage or load outside of the specifications may cause permanent damage to the unit.


WHITE, BLACK, SILVER, MATT WHITE & MATT BLACK BUTTONS AVAILABLE:


MEBUMW & MEBUMBK (curved button for Flat Cat),
MEBUC & MEBUCBK (flat button for Leopard and Snow Leopard),
MEBUCSV (flat button for Snow Leopard Silver finishes)
MEBUCMW & MEBUCMBK (flat button for Clouded Leopard matt finishes)



WIRING INSTRUCTIONS



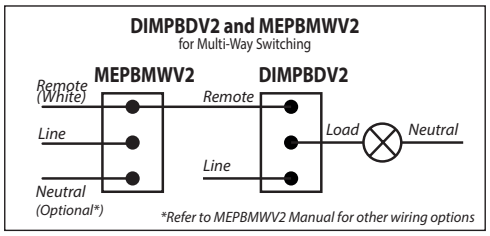

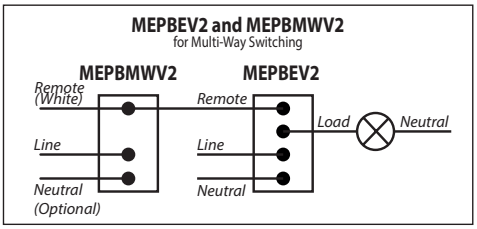

Certification Number:
TBC

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au