BUFFALO
CHEMICAL RESISTANT
GREY FOR ALKALINE/CAUSTIC

TRADER®

BUEXSOA320RG
BUEXSOA332RG
BUEXSOA410RG
BUEXSOA420RG
BUEXSOA432RG
BUEXSOA440RG
BUEXSOA450RG
BUEXSOA510RG
BUEXSOA520RG
BUEXSOA532RG
BUEXSOA540RG
BUEXSOA550RG

See current catalogue for further detail

IP66 Extension Angled Sockets

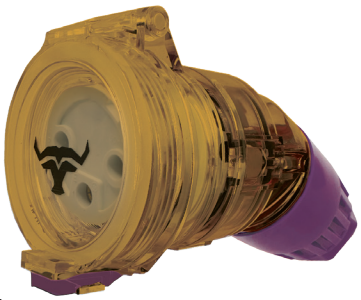

- Size 1 Single & Three Phase 10A to 20A (250V~ to 500V~).
- Size 2 Single & Three Phase 32A to 50A (250V~ to 500V~).
- 3 Round Pin, 4 Round Pin, 5 Round Pin.
- 10A, 15A, 20A, 32A, 40A & 50A current ratings.
- Ribbed Lock ring on Small Single Phase versions for gripping with gloved hands.
- Rear cord entry and cable gland ensuring IP66 rating.
- Internal cable clamp to support electrical connections.
- Chemical Resistant Grey for Alkaline Applications.
- Size 1 Single and Three Phase suits Smaller to Medium single or three phase loads.
- Size 2 Single and Three Phase suits Medium to Large single or three phase loads.
- Size 1 and Size 2 products have hinged Spring Loaded cover flaps for added safety and to keep dust & water out.
- Small Extension Sockets 10A and 20A accept cables from ø 6-12mm
  Size 1 Extension Sockets 10A and 20A accept cables from ø 12-16mm
  Size 2 Extension Sockets 32A, 40A and 50A accept cables from ø 11-16mm
- NOTE: RG models use purple thread rings and lock glands to represent the pH scale.

Pin & Volt	*Cat No. Extension Sockets	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Terminal Size	Maximum Conductor Size (mm^2)	Minimum Cable Diameter (mm2)	Maximum Cable Diameter (mm2)	Gland Nut Thread (mm)	Matching Plug Straight / Angled
3 Pin 250V~	BUEXSOA320RG	20	3 Round	G	ø4.6	6	12	16	M25 x 1.5	BUP320RG/ BUPA320RG
	BUEXSOA332RG	32	3 Round	H	ø6	16	11	16	M37 x 1.5	BUP332G/ BUPA332RG
4 Pin 500V~	BUEXSOA410RG	10	4 Round	I	ø4.6	6	12	16	M25 x 1.5	BUP410RG/ BUPA410RG
	BUEXSOA420RG	20	4 Round	J	ø4.6	6	12	16	M25 x 1.5	BUP420RG/ BUPA420RG
	BUEXSOA432RG	32	4 Round	K	ø 6	16	11	16	M37 x 1.5	BUP432RG/ BUPA432RG
	BUEXSOA440RG	40	4 Round	L	ø 6	16	11	16	M37 x 1.5	BUP440RG/ BUPA440RG
	BUEXSOA450RG	50	4 Round	M	ø 6	16	11	16	M37 x 1.5	BUP450RG/ BUPA450RG
5 Pin 500V~	BUEXSOA510RG	10	5 Round	N	ø4.6	6	12	16	M25 x 1.5	BUP510RG/ BUPA510RG
	BUEXSOA520RG	20	5 Round	O	ø4.6	6	12	16	M25 x 1.5	BUP520RG/ BUPA520RG
	BUEXSOA532RG	32	5 Round	P	ø 6	16	11	16	M37 x 1.5	BUP532RG/ BUPA532RG
	BUEXSOA540RG	40	5 Round	Q	ø 6	16	11	16	M37 x 1.5	BUP540RG/ BUPA540RG
	BUEXSOA550RG	50	5 Round	R	ø 6	16	11	16	M37 x 1.5	BUP550RG/ BUPA550RG



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Certification Number:
BUESXOA320RG, BUESXOA332RG, BUESXOA410RG, BUESXOA420RG, BUESXOA432RG, BUESXOA440RG, BUESXOA450RG, BUESXOA510RG, BUESXOA520RG, BUESXOA532RG, BUESXOA540RG, BUESXOA550RG: GMA-527928

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au

100% AUSTRALIAN OWNED & OPERATED

10 Yr Warranty

IP66 Extension Angled Sockets

BUEXSOA320RG
BUEXSOA332RG
BUEXSOA410RG
BUEXSOA420RG
BUEXSOA432RG
BUEXSOA440RG
BUEXSOA450RG
BUEXSOA510RG
BUEXSOA520RG
BUEXSOA532RG
BUEXSOA540RG
BUEXSOA550RG

See current catalogue for further detail

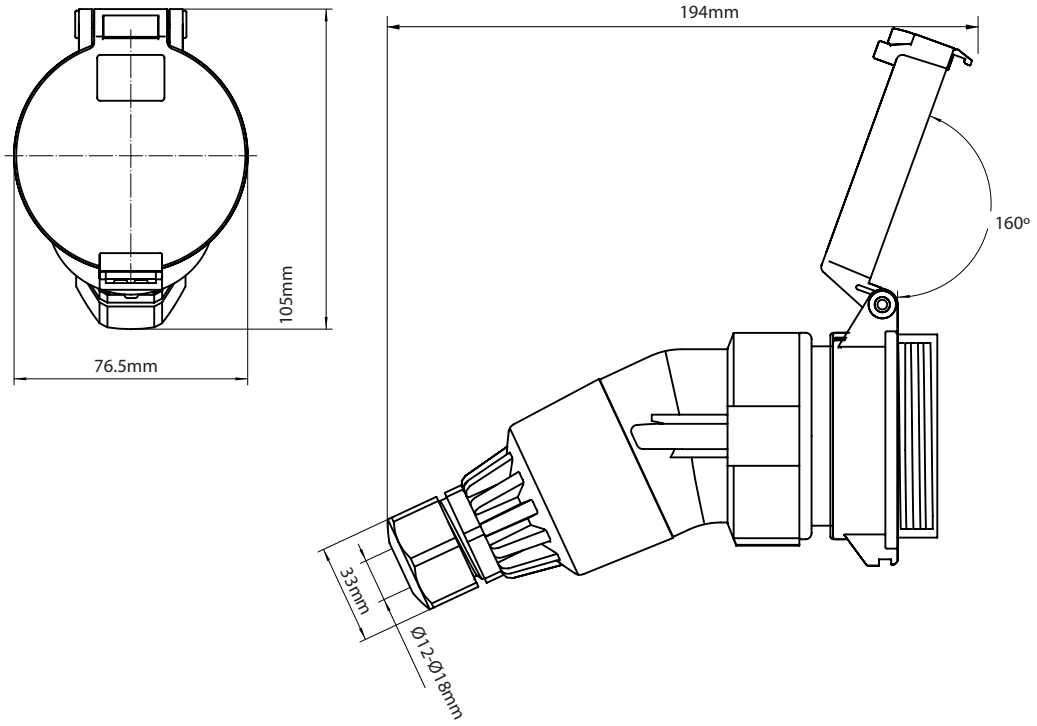

Size 1 Single & Three Phase



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

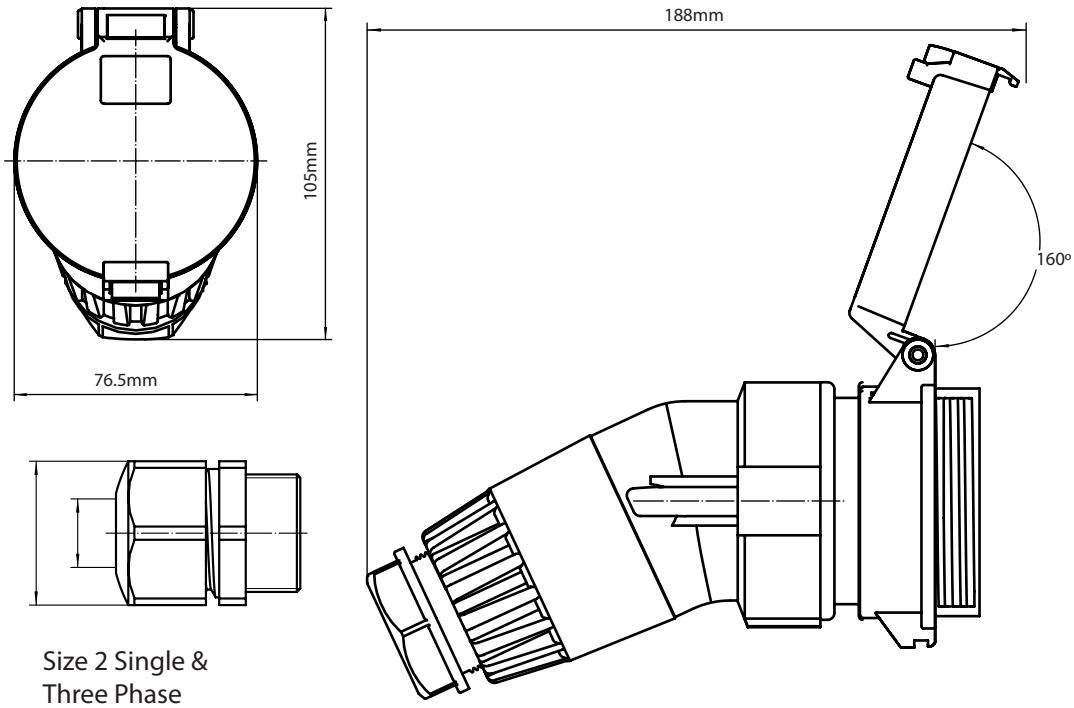

Size 2 Single & Three Phase

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au