


**CBCP20**  
**CBCP25**  
**CBCP32**  
**CBCP40**

See current catalogue for further detail

## Conduit Connector Plain Couplings

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 20mm, 25mm, 32mm & 40mm tube
- Standards: AS/NZS61386.1:2015;  
IEC 61386-1: 2008 Part 1: General requirements;  
IEC 61386-21: 2002 Part 21: Particular requirements – Rigid conduit systems

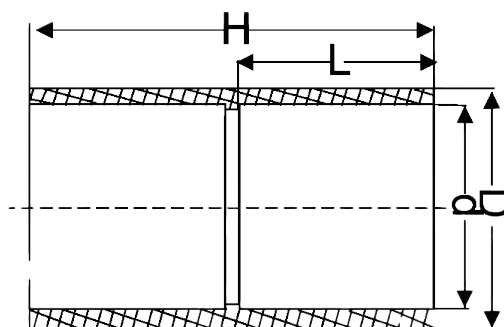

| Catalogue Number | Size Spec (mm) | D    | d    | L    | H    |
|------------------|----------------|------|------|------|------|
| CBCP20           | 20             | 24.0 | 20.1 | 20.3 | 42.0 |
| CBCP25           | 25             | 29.0 | 25.2 | 25.2 | 52.0 |
| CBCP32           | 32             | 36.3 | 32.2 | 27.7 | 57.8 |
| CBCP40           | 40             | 46.3 | 40   | 39   | 80   |

| Catalogue Number | Description                           |
|------------------|---------------------------------------|
| CBCP20           | Coupling 20mm PVC Grey                |
| CBCP25           | Coupling 25mm PVC Grey                |
| CBCP32           | Coupling Plain to Plain 32mm PVC Grey |
| CBCP40           | Coupling Plain to Plain 40mm PVC Grey |

**Certification Number:**

AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

**GSM Electrical (Australia) Pty Ltd**

5-9 Rundle Street, Kent Town SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

