



CBCPPS20
CBCPPS25
CBCPPS32


See current catalogue for further detail

Conduit Coupling Plain to Screwed

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Connector type: Plain to Screwed
- Thread type: M20 M25 & M32x1.5
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Joining plain conduit to threaded entries or fittings.
(20mm plain/screwed, 25mm plain/screwed, 32mm plain screw)

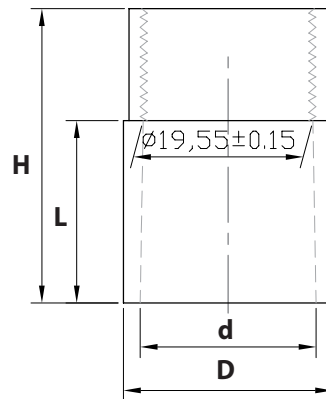

CBCPPS20 / CBCPPS25



CBCPPS32

Uses ribbed tightening grip instead of nut.

Product Code	Size Spec (mm)	D	d	L	H	S	D1
CBCPPS20	20	24	20	21	34	23	/
CBCPPS25	25	30	25	13	36	28	/
CBCPPS32	32	37	32	29.5	49	/	40

Catalogue Number	Description
CBCPPS20	Coupling Plain to Screwed 20mm PVC Grey
CBCPPS25	Coupling Plain to Screwed 25mm PVC Grey
CBCPPS32	Coupling Plain to Screwed 32mm PVC Grey

Certification Number:

AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

GSM Electrical (Australia) Pty Ltd

5-9 Rundle Street, Kent Town SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

