



GBSCSDBUG7G20 GBSCSDBUG7G35 GBSCSDBUG7G40 GBSCSDBUG8G63

See current catalogue for further detail



GBSCSDBUG7G20 GBSCSDBUG7G35



GBSCSDBUG7G40 GBSCSDBUG8G63



GBSCSDBUG7G20
GBSCSDBUG7G35
GBSCSDBUG7G40
GBSCSDBUG8G63
are included in
GBSCSDMIX12

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Bugle Head Screws

For Plasterboard and Timber

- Head Style: Bugle Head Drive Type: Phillips Screw Point: Needle Point (Type AB)
- Material: Carbon Steel
- Class Grade: Class 2
- Finish: Zinc Yellow
- Corrosion Protection Level: Moderate
- Internal External: Internal
- Tested in accordance with AS3566.1

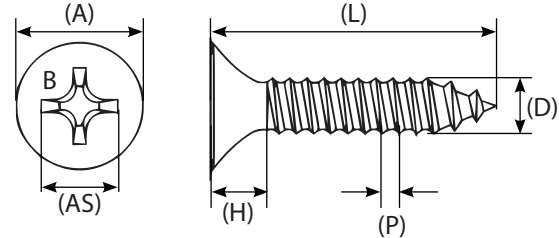

Part Number		GBSCSDBUG7G20	GBSCSDBUG7G35	GBSCSDBUG7G40	GBSCSDBUG8G63
Size		7g (3.90mm)	7g (3.90mm)	7g (3.90mm)	8g (4.20mm)
Length (mm)		20	35	40	63
Thread Pitch (P) (mm)		1.80	1.80	1.80	1.80
Product Diameter (D) (mm)	Min	3.80	3.8	3.8	4.0
	Max	3.90	3.90	3.90	4.20
Head Diameter (A) (mm)	Min	8.60	8.60	8.60	8.60
	Max	8.80	8.80	8.80	8.80
Head Height (H) (mm)	Min	3.00	3.00	3.00	3.00
	Max	3.20	3.20	3.20	3.20
Steel Thickness (mm)	Min	0.42	0.42	0.42	0.42
	Max	1.00	1.00	1.00	1.00
Single Shear (kN)	Nom	3.400	3.400	3.400	4.100
Axial Tensile (kN)	Nom	5.800	5.800	5.800	8.700
Torsional (Nm)	Nom	4.500	4.500	4.500	5.900
Driver Bit Size (AS)	Nom	PH2	PH2	PH2	PH2

Catalogue Number	Description
GBSCSDBUG7G20	Screw Self Drill Bugle Head 7 Gauge x 20mm 100 pcs
GBSCSDBUG7G35	Screw Self Drill Bugle Head 7 Gauge x 35mm 100 pcs
GBSCSDBUG7G40	Screw Self Drill Bugle Head 7 Gauge x 40mm 100 pcs
GBSCSDBUG8G63	Screw Self Drill Bugle Head 8 Gauge x 63mm 100 pcs
GBSCSDMIX12	Screw Self Drill Mix 12 Variety Pack

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsm.com.au
www.gsm.com.au





GBSCSDPAN6G20 GBSCSDPAN6G30 GBSCSDPAN7G45 GBSCSDPAN7G50

See current catalogue for further detail



GBSCSDPAN6G20

GBSCSDPAN6G30



GBSCSDPAN7G45

GBSCSDPAN7G50



GBSCSDPAN6G20
GBSCSDPAN6G30
GBSCSDPAN7G45
GBSCSDPAN7G50
are included in
GBSCSDMIX12

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Pan Head Screws

For Plasterboard and Timber

- Head Style: Pan Head Drive Type: Phillips Screw Point: Needle Point (Type AB)
- Material: Carbon Steel
- Class Grade: Class 2
- Finish: Zinc Yellow
- Corrosion Protection Level: Moderate
- Internal External: Internal
- Tested in accordance with AS3566.1

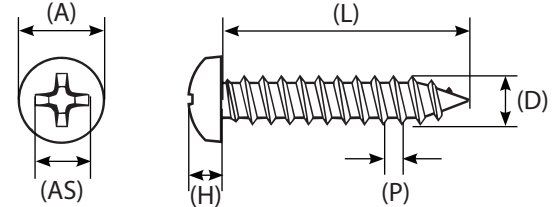

Part Number		GBSCSDPAN6G20	GBSCSDPAN6G30	GBSCSDPAN7G45	GBSCSDPAN7G50
Size		6g (3.50mm)	6g (3.50mm)	7g (3.90mm)	8g (4.20mm)
Length (mm)		20	35	40	50
Thread Pitch (P) (mm)		1.30	1.30	1.80	1.80
Product Diameter (D) (mm)	Min	3.40	3.40	3.80	3.80
	Max	3.50	3.50	3.90	3.90
Head Diameter (A) (mm)	Min	8.20	8.20	8.20	8.20
	Max	8.40	8.40	8.40	8.40
Head Height (H) (mm)	Min	6.90	6.90	6.90	6.90
	Max	7.00	7.00	7.00	7.00
Steel Thickness (mm)	Min	0.42	0.42	0.42	0.42
	Max	1.00	1.00	1.00	1.00
Single Shear (kN)	Nom	3.300	3.300	3.400	3.400
Axial Tensile (kN)	Nom	5.500	5.500	5.800	5.800
Torsional (Nm)	Nom	3.600	3.600	4.500	4.500
Driver Bit Size (AS)	Nom	PH2	PH2	PH2	PH2

Catalogue Number	Description
GBSCSDPAN6G20	Screw Self Drill Pan Head 6 Gauge x 20mm 100 pcs
GBSCSDPAN6G30	Screw Self Drill Pan Head 6 Gauge x 30mm 100 pcs
GBSCSDPAN7G45	Screw Self Drill Pan Head 7 Gauge x 45mm 100 pcs
GBSCSDPAN7G50	Screw Self Drill Pan Head 7 Gauge x 50mm 100 pcs
GBSCSDMIX12	Screw Self Drill Mix 12 Variety Pack

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsm.com.au
www.gsm.com.au





GBSCSDWAF10G30

See current catalogue for further detail



GBSCSDWAF10G30



GBSCSDWAF10G30
is included in
GBSCSDMIX12

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Wafer Head Screws

For Plasterboard and Steel or other metals

- Head Style: Wafer Head Drive Type: Phillips Screw Point: Tech self-drilling
- Material: Carbon Steel
- Class Grade: Class 2
- Finish: Zinc Yellow
- Corrosion Protection Level: Moderate
- Internal External: Internal
- Tested in accordance with AS3566.1

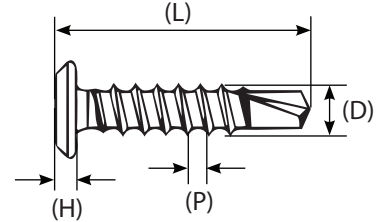

Part Number		GBSCSDWAF10G30
Size		10g (4.80mm)
Length (mm)		30
Thread Pitch (P) (mm)		1.10
Product Diameter (D) (mm)	Min	4.65
	Max	4.80
Head Diameter (A) (mm)	Min	8.60
	Max	8.80
Head Height (H) (mm)	Min	9.00
	Max	9.20
Steel Thickness (mm)	Min	0.42
	Max	1.00
Single Shear (kN)	Nom	5.400
Axial Tensile (kN)	Nom	9.300
Torsional (Nm)	Nom	7.200
Driver Bit Size (AS)	Nom	PH2

Catalogue Number	Description
GBSCSDWAF10G30	Screw Self Drill Wafer Head 10 Gauge x 30mm 100 pcs
GBSCSDMIX12	Screw Self Drill Mix 12 Variety Pack

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au





GBSCSDWAS8G23 GBSCSDWAS8G25 GBSCSDWAS8G32

See current catalogue for further detail



GBSCSDWAS8G23

GBSCSDWAS8G25



GBSCSDWAS8G32



GBSCSDWAS8G23
GBSCSDWAS8G25
GBSCSDWAS8G32
are included in
GBSCSDMIX12

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.





Oct 2026

Washer Head Screws

GBSCSDWAS8G23 / GBSCSDWAS8G25 - For Plasterboard and Steel or other metals
GBSCSDWAS8G32 - For Plasterboard and Timber

- Head Style: Washer Head Wafer Style Drive Type: Phillips Screw Point: Tech self-drilling
- Material: Carbon Steel
- Class Grade: Class 2
- Finish: Zinc Yellow
- Corrosion Protection Level: Moderate
- Internal External: Internal
- Tested in accordance with AS3566.1

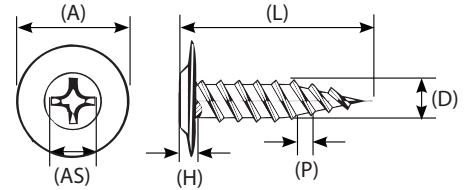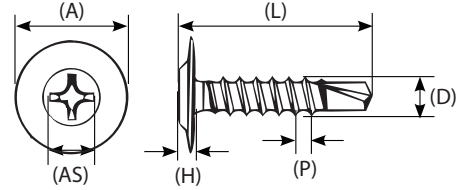

GBSCSDWAS8G32

Part Number		GBSCSDWAS8G23	GBSCSDWAS8G25	GBSCSDWAS8G32
Size		8g (4.20mm)	8g (4.20mm)	8g (4.20mm)
Length (mm)		23	25	32
Thread Pitch (P) (mm)		1.40	1.40	1.80
Product Diameter (D) (mm)	Min	4.00	4.00	4.00
	Max	4.20	4.20	4.20
Head Diameter (A) (mm)	Min	11.50	11.50	11.50
	Max	11.70	11.70	11.70
Head Height (H) (mm)	Min	3.00	3.00	3.00
	Max	3.20	3.20	3.20
Steel Thickness (mm)	Min	0.42	0.42	0.42
	Max	1.00	1.00	1.00
Single Shear (kN)	Nom	4.100	4.100	4.100
Axial Tensile (kN)	Nom	8.700	8.700	8.700
Torsional (Nm)	Nom	5.900	5.900	5.900
Driver Bit Size (AS)	Nom	PH2	PH2	PH2

Catalogue Number	Description
GBSCSDWAS8G23	Screw Self Drill Washer Head 8 Gauge x 23mm 100 pcs
GBSCSDWAS8G25	Screw Self Drill Washer Head 8 Gauge x 25mm 100 pcs
GBSCSDWAS8G32	Screw Self Drill Washer Head 8 Gauge x 32mm 100 pcs
GBSCSDMIX12	Screw Self Drill Mix 12 Variety Pack

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsm.com.au
www.gsm.com.au

