

FNCEFDR FNCEFDS FNCEFDG


See current catalogue for further detail

Ceiling Exhaust Fans Ducted

- Ideal for rapid removal of steam and odors
- Easy to clean grille
- Quiet operation
- Built in non-return draft excluder
- Retro-fit for 295mm round cut-out
- Plug and lead fitted
- No duct included (150mm duct compatible)
- Suitable for ceilings between 5mm and 12mm
- 40 Watt Ball Bearing Motor
- Ducting Outlet Ø150mm
- Airflow 350 m³/h
- Cutout size Ø295mm
- **FNCEFDS** once the fascia has been attached the fascia can be rotated approx. 45deg clockwise/anti-clockwise to gain the correct alignment.
- **FNCEFDG** (Grille) - includes fly mesh and duct clamps (150mm duct compatible)



SAFETY WARNING: All power outlets or electrical wiring must be installed by a licensed and qualified electrician.

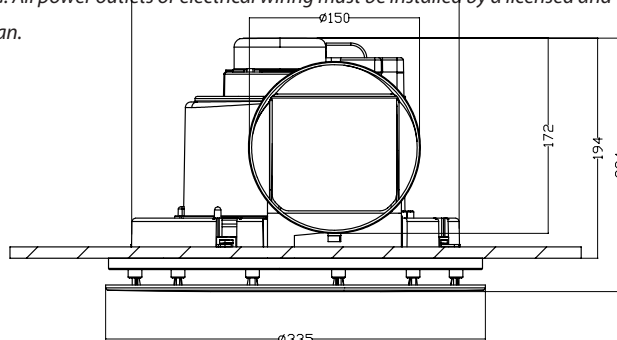


Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

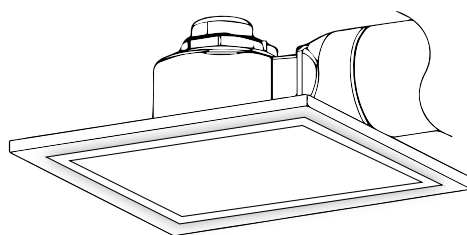

FNCEFDS

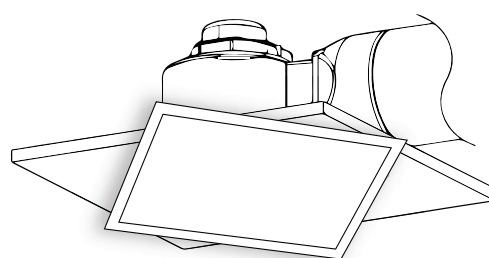

FNCEFDS rotated approx 45deg

Catalogue Number	Description
FNCEFDR	Ceiling Exhaust Fan Ducted Round Fascia Cut Out 295mm with Air Movement of 350 Cubic Metres per Hour Suits 150mm Duct 40W Ball Bearing Motor No Ducting Kit
FNCEFDS	Ceiling Exhaust Fan Ducted Square Fascia Cut Out 295mm with Air Movement of 350 Cubic Metres per Hour Suits 150mm Duct 40W Ball Bearing Motor No Ducting Kit
FNCEFDG	Ceiling Exhaust Fan Ducted Outer Grille Only with Fly Mesh Suits 150mm Duct

Certification Number:

GMA-512149-EA

GSM Electrical (Australia) Pty Ltd

5-9 Rundle Street, Kent Town SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

