

FNCEFDSR FNCEFDSS


See current catalogue for further detail

Ceiling Exhaust Fans Ducted Small

- High air extraction up to 270m³/hr
- Energy efficient 30 Watt ball bearing motor
- Rated voltage 220-240V~50Hz
- Cutout size Ø245mm
- Ducting Outlet Ø100mm
- Power cord included
- Slide is ducted with draft stopper
- Cutting Template Ø245mm (on inside top flap of packaging), also provided in box
- Does not come with duct or outlet grille
- Quick and easy installation
- Ideal for bathrooms, toilets, or kitchens



SAFETY WARNING: All power outlets or electrical wiring must be installed by a licensed and qualified electrician.

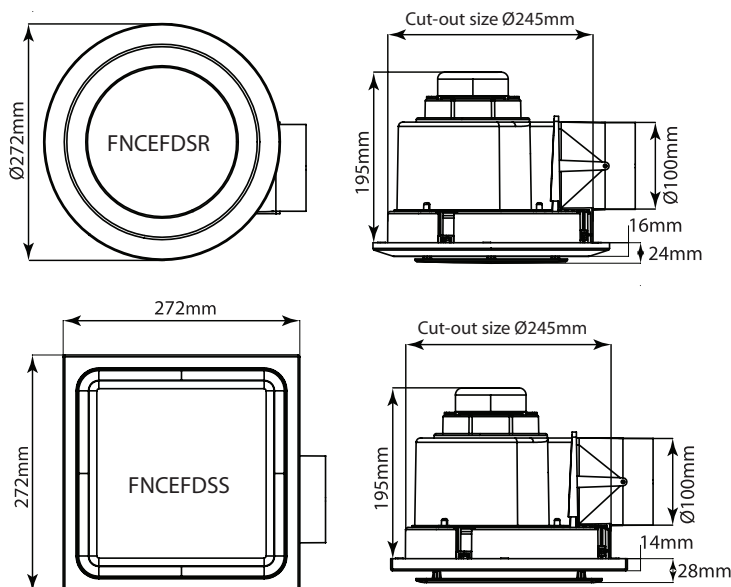

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
FNCEFDSR	Ceiling Exhaust Fan Ducted Small Round Facia Cut Out 245mm Air Movement of 270 Cubic Metres per Hour Suits 100mm Duct 30W Ball Bearing Motor No Ducting Kit
FNCEFDSS	Cubic Metres per Hour Suits 100mm Duct 30W Ball Bearing Motor No Ducting Kit

Certification Number:

GMA-512149-EA

GSM Electrical (Australia) Pty Ltd

5-9 Rundle Street, Kent Town SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

