GBSCSDWAF10G30

See current catalogue for further detail



GBSCSDWAF10G30



GBSCSDWAF10G30 is included in GBSCSDMIX12

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Wafer Head Screws

For Plasterboard and Steel or other metals

- Head Style: Wafer Head Drive Type: Phillips Screw Point: Tech self-drilling
- Material: Carbon Steel
- Class Grade: Class 2
- Finish: Zinc Yellow
- Corrosion Protection Level: Moderate
- Internal External: Internal
- Tested in accordance with AS3566.1

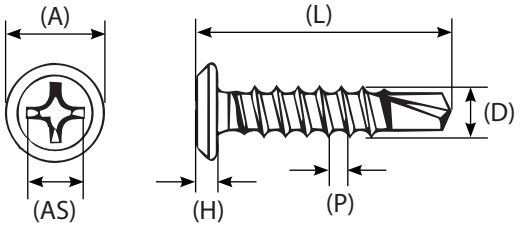

Part Number		GBSCSDWAF10G30
Size		10g (4.80mm)
Length (mm)		30
Thread Pitch (P) (mm)		1.10
Product Diameter (D) (mm)	Min	4.65
	Max	4.80
Head Diameter (A) (mm)	Min	8.60
	Max	8.80
Head Height (H) (mm)	Min	9.00
	Max	9.20
Steel Thickness (mm)	Min	0.42
	Max	1.00
Single Shear (kN)	Nom	5.400
Axial Tensile (kN)	Nom	9.300
Torsional (Nm)	Nom	7.200
Driver Bit Size (AS)	Nom	PH2

Catalogue Number	Description
GBSCSDWAF10G30	Screw Self Drill Wafer Head 10 Gauge x 30mm 100 pcs
GBSCSDMIX12	Screw Self Drill Mix 12 Variety Pack

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au