
WOBBF41
WOBBF63
WOBBF121
WOBBF164
WOBBF181
WOBBP18C
WOBBF182
WOBBF183

See current catalogue for further detail

Busbar Range


WOBBF121

- Designed for single pole feed in for Active
- Rated current In, busbar comb, end feed 80A
- Rated Voltage 230V
- Type connection Fork type
- Number of phases 1
- Number of modules 12
- Insulated sleeve
- Not Suitable for devices with N-conductor
- Module width 18mm
- Cross section 16mm²

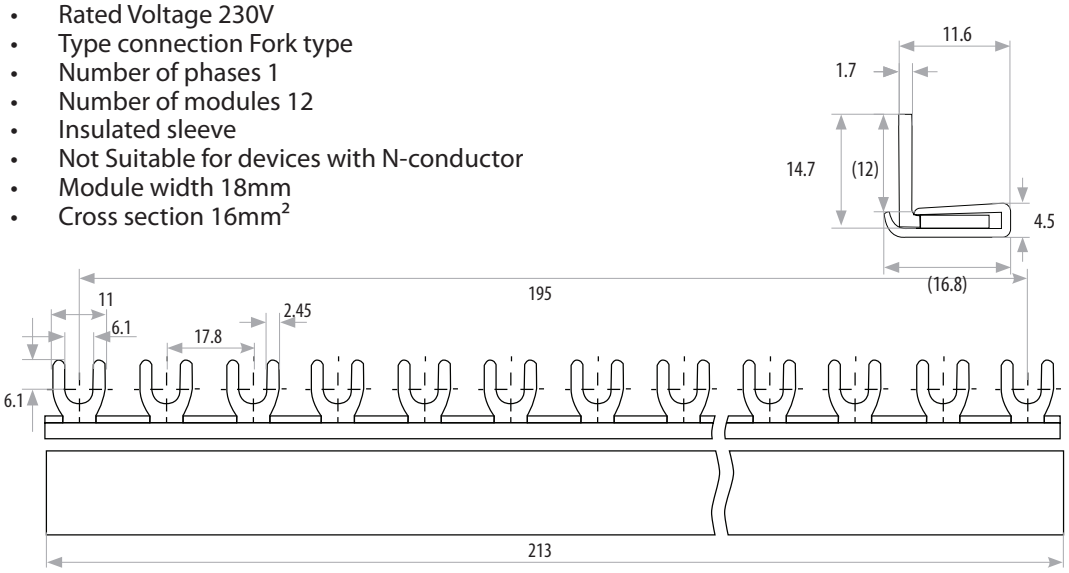

WOBBF164

- This 16 way 4 pole bus bar is designed to suit applications for 4 pole RCBO's where the 4th pole links the Neutral
- Designed for three phase feed in for Active also contains a Neutral Bar feature
- Rated current In, busbar comb, end feed 80A
- Rated Voltage 230V/400V
- Type connection Fork type
- Number of phases 3+N
- Number of modules 16
- Insulated sleeve
- Suitable for devices with N-conductor
- Module width 18mm
- Cross section 16mm²

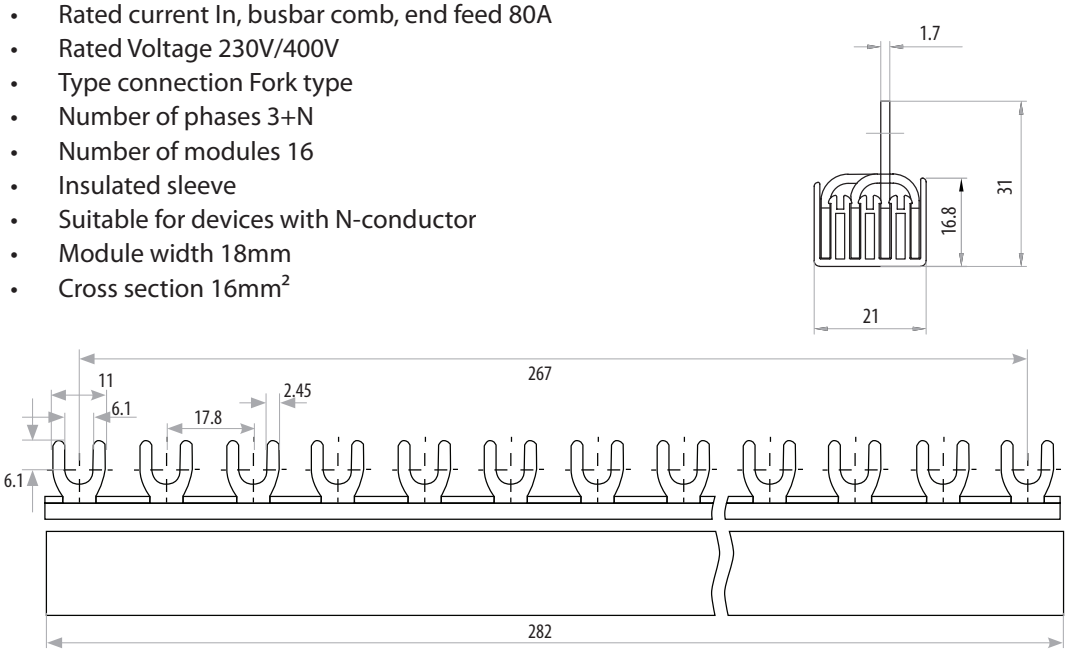

Catalogue Number	Description
WOBBF121	Busbar Insulated Fork 80 Amp 1 Pole 12 Module Purple
WOBBF164	Busbar Insulated Fork 80 Amp 4 Pole 16 Module Purple

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au