




ОИТРИТ		
AC Output	Rated Voltage	AC 240V
	Rated Power	300W Max
	Frequency	50Hz
	Output Wave	Pure Sine Wave
DC Output	Rated Voltage	12~13V
	Rated Current	8~10A
QC 3.0 Output	Rated Power	18W
Type-C Output	Rated Power	PD:100W
USB Output	Rated Voltage	5V
	Rated Current	2.1A
Floodlight	Rated Power	7W
INPUT		
DC Input	Rated Voltage	15A
	Rated Current	5A
Type-C Input	Rated Power	PD:100W (Max)
BATTERY		
Rated Capacity	14.4V/20Ah/288Wh	
Battery Cell Type	NMC	
GENERAL		
Working	Charging Temperature: 0~45°C	
Environment Condition	Discharge Temperature: -10~45°	
Size	225*121*200mm±5mm	

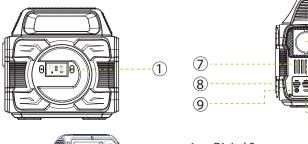



- Digital Screen Display
- 2. AC Output
- USB2 Output
 DC Output
- 4. DC Output
- 5. Type-C Output6. LED Lighting
- 7. QC3.0 Output8. USB1 Output
- 9. DC Output
- 10. Heat
 Dissipation
 Air Outlet
- 11. DC Input

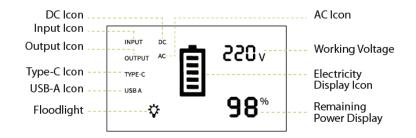

Electrical Charging

Phone (4000mAh)
Around 17 Recharges

Car Fridge (80W)

Around 3.1 Hours

Drone (50W)

Around 4.9 Recharges



Camera (35W) Around 7 Rechargers



Notebook Computer (110W) Around 2.2 Hours



Rice Cooker (280W) Around 0.9 Hours



Kettle (260W) Around 0.9 Hours





Projector (110W) Around 2.2 Hours





Around 4.4 Hours

Electric Drill (220W)

Around 1.1 Hours

Electric Fan (55W)

Charging Mode

Before using this energy storage power supply, ensure it is fully charged. If the LED shows less than 20% capacity, connect it to a power source through DC input or Type-C input port for recharging as soon as possible.

There are two ways to recharge your Power Station.

DC Input:



AC Wall Charger (60W) Around 5.5 Hours



100W Solar Panels
Around 3.6 Hours



Car charger to DC*5521 (60W) Around 5.5 Hours

Type-C Input:



Type-C (PD100W MAX) Around 3.5 Hours