BESMOKEY10BWV2

See current catalogue for further detail

Photoelectric Smoke Alarm Wireless (Non Removable) Lithium Battery Only



- Photoelectric Sensing Technology.
- Activfire® Listed.
- Complies with AS3786:2023.
- Main power source: Built-in DC3V Lithium battery (battery not replaceable).
- Wireless Interconnection Max. 40 alarms.
- Wireless distance Max. 100 metres in free field.
- Wireless Frequency test 433.42MHZ
- Suitable for Ceiling or Wall Mounting.
- Alarm volume ≥ 85dB(A) @ 3m complying with ISO8201 alarm pattern.
- Operating Temperature 0 °C - 40 °C.
- Maximum humidity for installation: ≥93 % Relative Humidity.
- Central test & Activation Button.
- Red LED Alarm Status Indication.
- Insect Screen protects Sensing Chamber.
- Sleek Styling.
- Dual-Spectrum Technology.
- 5.9x Greater Dust Tolerance*
- 5.6x Greater Insect Resistance*
- 4.4x Greater Vapour Resistance*
- 3.9x Greater Construction-Dust Resistance*
- The BESMOKEY10V2 with BESMOKEY10WMV2 can also pair to BESMOKEY10BWV2.
- ONLY COMPATIBLE WITH BESMOKEY10V2 WITH BESMOKEY10WMV2 AND BESMOKEY10REMV2
- 10 Year warranty.

*Compared with BESMOKEY10 1st Generation Sensor Technology

BESMOKEY10 Smoke Alarms come with a 10 Year Warranty from date of purchase. BESMOKEY10 Accessories are warranted for 7 Years from date of purchase. Proof of Purchase is required for Warranty Claims

– please see www.gsme.com.au for details regarding warranty claims.

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Catalogue Number	Description
BESMOKEY10BWV2	Smoke Alarm Wireless Interconnect Photoelectric Surface Mount Non Removable 3V DC Lithium 10 Year Battery Powered Only White

Certification Number:
Activfire: afp-4045

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au

BESMOKEY10BWV2

See current catalogue for further detail


Photoelectric Smoke Alarm Wireless (Non Removable) Lithium Battery Only



BESMOKEY10BWV2 can be used with BESMOKEY10REMV2.

BESMOKEY10BWV2 is also networkable with BESMOKEY10V2 with BESMOKEY10WMV2 Installed.

Example of a network using BESMOKEY10BWV2 and BESMOKEY10V2 combined with hard wired and interconnected (using cable) with a single "master" alarm with the BESMOKEY10MWV2 module fitted communicating with others in the system that are operating from the 10 Year Lithium battery.

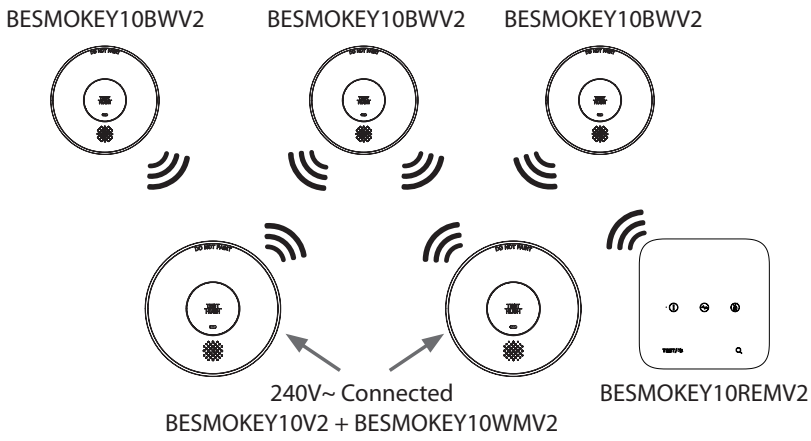

BESMOKEY10REMV2 can be installed on wireless network for convenient control.

ONLY COMPATIBLE WITH BESMOKEY10V2 WITH BESMOKEY10WMV2 AND BESMOKEY10REMV2

BESMOKEY10 Smoke Alarms come with a 10 Year Warranty from date of purchase. BESMOKEY10 Accessories are warranted for 7 Years from date of purchase. Proof of Purchase is required for Warranty Claims

– please see www.gsme.com.au for details regarding warranty claims.

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Certification Number:

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au