MEPBEV2

See current catalogue for further detail

BUTTON CAPS:
MEBUMW
MEBUMBK
MEBUC
MEBUCBK
MEBUCSV
MEBUCMW
MEBUCMBK





Amber & Blue LED

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Push Button Switching

MEPBEV2 Push Button, Electronic On/Off Switch, 3-wire

FEATURES

- Soft touch push button ON/ OFF switch.
- Programmable Blue or Amber indicator light
- Returns to OFF after loss of power.
- Compatible with a wide range of load types including wire wound transformers & fan motors.
- Multi-Way Switching when used in conjunction with the **MEPBMWV2** Multi-Way Remote Dimmer & ON/OFF Push Button.
- Supplied with MEBU Gloss White & Gloss Black buttons, suits Puma, Cougar & Flat Cat gloss finishes.

OPERATING CONDITIONS

- Operating Voltage: 230 – 240V a.c. 50Hz
- Maximum Load: 1200W / 250W (see table below)
- Maximum Current Capacity: 5A
- Terminals: Screw Terminals suit 0.5mm² to 1.5mm² stranded cable (bootlace terminal recommended)
- Operating Temperature: 0 to +50 °C
- Compliance Standard: CISPR15, AS/NZS 3100, AS/NZS 60669.2.1


Note: Operation at temperature, voltage or load outside of the specifications may cause permanent damage to the unit.

LOAD COMPATIBILITY


LOAD TYPE	COMPATIBILITY
Incandescent / 240V Halogen	1200W
Fluorescent Tube with Electronic Ballast	400W
Fluorescent Tube with Iron Core Ballast	400W
Compact Fluorescent	400W
Electronic Transformer	400W
LED	250W
Wirewound Transformer	400W
Fan Motors	400W
Heating Elements	1200W


WHITE, BLACK, SILVER, MATT WHITE & MATT BLACK BUTTONS AVAILABLE:

MEBUMW & MEBUMBK (curved button for Flat Cat),
MEBUC & MEBUCBK (flat button for Leopard and Snow Leopard),
MEBUCSV (flat button for Snow Leopard Silver finishes)
MEBUCMW & MEBUCMBK (flat button for Clouded Leopard matt finishes)



WIRING INSTRUCTIONS



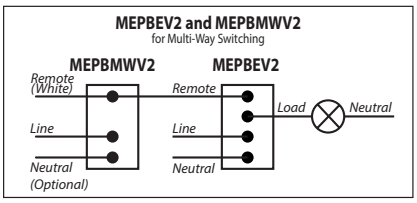

Catalogue Number	Description
MEPBEV2	Switch Mechanism Push Button Electronic ON OFF 3 Wire Master Suits MEPB Range Amber and Blue LED with Gloss White and Black Buttons
MEBUMW	Button Curved Profile for MEPBE MEPBMW DIMPBD Matt White Suits Flat Cat, Puma and Cougar
MEBUMBK	Button Curved Profile for MEPBE MEPBMBK DIMPBD Matt Black Suits Flat Cat, Puma and Cougar
MEBUC	Button Flat Profile for MEPBE MEPBMW DIMPBD White Suits Senoa Simple, Snow Leopard and Leopard
MEBUCBK	Button Flat Profile for MEPBE MEPBMW DIMPBD Black Suits Senoa Simple, Snow Leopard and Leopard
MEBUCMW	Button Flat Profile for MEPBE MEPBMW DIMPBD Matt White Suits Clouded Leopard
MEBUCMBK	Button Flat Profile for MEPBE MEPBMW DIMPBD Matt Black Suits Clouded Leopard

Certification Number:
TBC

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au



