GBSCSDWAS8G23
GBSCSDWAS8G25
GBSCSDWAS8G32

See current catalogue for further detail



GBSCSDWAS8G23



GBSCSDWAS8G25



GBSCSDWAS8G32



GBSCSDWAS8G23
GBSCSDWAS8G25
GBSCSDWAS8G32
are included in
GBSCSDMIX12

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.




Washer Head Screws

GBSCSDWAS8G23 / GBSCSDWAS8G25 - For Plasterboard and Steel or other metals
GBSCSDWAS8G32 - For Plasterboard and Timber

- Head Style: Washer Head Wafer Style Drive Type: Phillips Screw Point: Tech self-drilling
- Material: Carbon Steel
- Class Grade: Class 2
- Finish: Zinc Yellow
- Corrosion Protection Level: Moderate
- Internal External: Internal
- Tested in accordance with AS3566.1

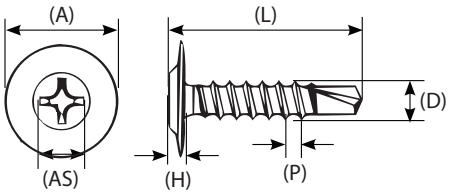

GBSCSDWAS8G32

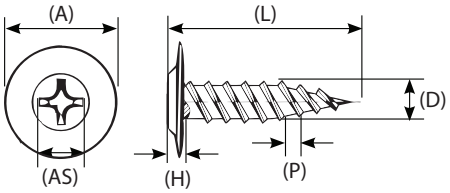

Part Number		GBSCSDWAS8G23	GBSCSDWAS8G25	GBSCSDWAS8G32
Size		8g (4.20mm)	8g (4.20mm)	8g (4.20mm)
Length (mm)		23	25	32
Thread Pitch (P) (mm)		1.40	1.40	1.80
Product Diameter (D) (mm)	Min	4.00	4.00	4.00
	Max	4.20	4.20	4.20
Head Diameter (A) (mm)	Min	11.50	11.50	11.50
	Max	11.70	11.70	11.70
Head Height (H) (mm)	Min	3.00	3.00	3.00
	Max	3.20	3.20	3.20
Steel Thickness (mm)	Min	0.42	0.42	0.42
	Max	1.00	1.00	1.00
Single Shear (kN)	Nom	4.100	4.100	4.100
Axial Tensile (kN)	Nom	8.700	8.700	8.700
Torsional (Nm)	Nom	5.900	5.900	5.900
Driver Bit Size (AS)	Nom	PH2	PH2	PH2

Catalogue Number	Description
GBSCSDWAS8G23	Screw Self Drill Washer Head 8 Gauge x 23mm 100 pcs
GBSCSDWAS8G25	Screw Self Drill Washer Head 8 Gauge x 25mm 100 pcs
GBSCSDWAS8G32	Screw Self Drill Washer Head 8 Gauge x 32mm 100 pcs
GBSCSDMIX12	Screw Self Drill Mix 12 Variety Pack

GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au